

KELPIE™ BALI Lantern

QBL LED



INSTRUCTIONS FOR USE

Please switch off machine before servicing or cleaning.

PRECAUTIONS



ALL PESTWEST® EFK'S ARE FULLY INSULATED, CLASS 1 APPLIANCES, NEVERTHELESS, SENSIBLE PRECAUTIONS SHOULD BE OBSERVED:

- Switch off the machine before servicing or cleaning.
- Keep out of reach of children.
- Do not install where dangerous concentrations of flammable gases or dusts are likely to occur.
- Ensure the unit is properly earthed.
- The Bali Lantern can be used by persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the Bali Lantern in a safe way and understand the hazards involved.
- If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons to avoid a hazard.
- A Risk Assessment for non-target species should be made prior to installation.



DANGER HIGH VOLTAGE!

We suggest the unit be kept on 24 hours a day, 365 days a year as some insects are about all year round. An additional advantage is security lighting for your premises. Operational costs are minimal by comparison to most other electrical appliances.

SAFETY/OPERATING INSTRUCTIONS

CAUTION: This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instructions concerning use of the appliance by a person responsible for their safety, supervision or instruction regarding the use of the device. That adult person should supervise children to ensure they do not play with the device. The device must be kept out of reach of children.

If the unit does not light up within a few seconds after plugging in, switch off unit and check globe fitted correctly, see back page.

This appliance is not to be used in locations where flammable vapour or explosive dust is likely to exist and is not suitable for use in barns, stables and similar locations. If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons to avoid a hazard.

WARNING: An electric shock hazard may exist if water from a garden hose is directed at the insect killer.

When using extension cords, keep the socket-outlet away from moisture and avoid damage to the cord.

TECHNICAL SPECIFICATIONS

VOLTAGE RANGE	220-240V
FREQUENCY RANGE	50-HZ
POWER CONSUMPTION (@230V 50Hz)	
CLASSIFICATION	CLASS 1
AMBIENT OPERATING TEMPERATURES	0 TO +40 °C
AREA OF COVERAGE	FREESTANDING 1000 m ²
REPLACEMENT GLOBES (2 QTY)	130-000340 QBL LED E27
MOUNTING METHOD	FREESTANDING
UNIT DIMENSIONS (CM)	W: 58 X D:58 X H: 83
IP RATING	IPX4 RATED

MAINTENANCE AND CLEANING INSTRUCTIONS

Unscrew both side metal guards. Clean insects off metal grills with small brush once every 3 to 6 months, depending on use. Empty catch tray when full. Securely re-screw in both side metal guards before plugging in power cord.



CAUTION!

You must switch off power & unplug unit before cleaning commences.

INSTALLATION & FIXING INSTRUCTIONS

For use in outdoor entertaining areas, such as patios, gardens etc. It kills flying insects such as flies and mosquitoes.

Do not locate near any heat sources (eg, barbeques) since these may damage the insulation of the electrical cable.

Avoid draughty locations and do not install above or close to food preparation areas. Do not install near any sink area.

REPLACING GLOBES

Replace globes as instructed in below images.




Please switch off machine before servicing or cleaning.



CAUTION
ALWAYS UNPLUG UNIT BEFORE SERVICING

KELPIE™ BALI Lantern

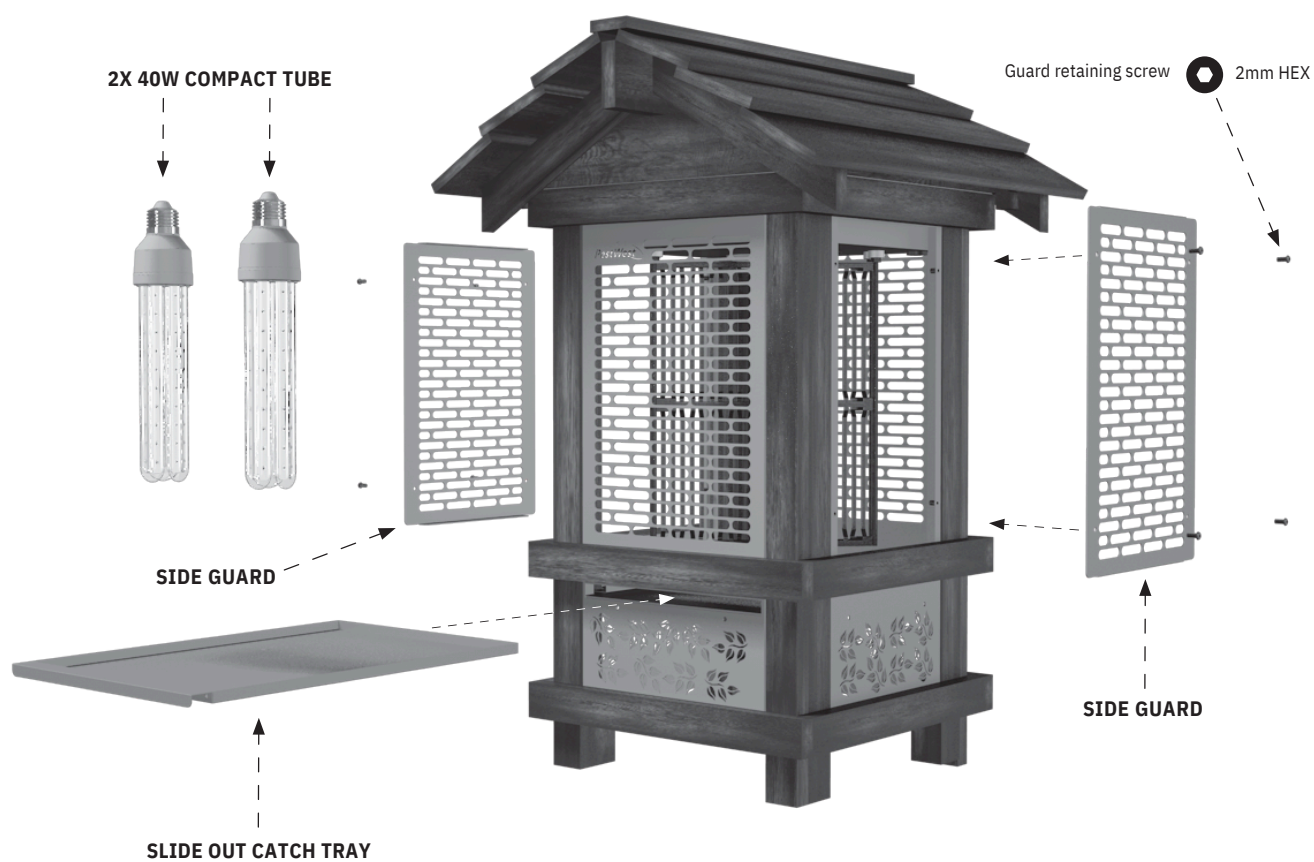

EACH UNIT COMES WITH THE FOLLOWING PARTS
2 x QBL LED E27 compact globes

Component Parts

CHANGING U-GLOBE INSTRUCTIONS

FIRST UNPLUG POWER

- 1) UNSCREW & REMOVE BOTH SIDE PANELS
- 2) UNSCREW BOTH LED GLOBES & REPLACE WITH NEW ONES
- 3) METAL TRAY CAN BE SLID OUT AT ANY TIME TO CLEAN OUT INSECTS.

**WE RECOMMEND THAT YOU ONLY USE GENUINE
REPLACEMENT PARTS FROM PESTWEST PRODUCTS
MANY CHEAPER BRANDS DO NOT MEET THE SAME HIGH STANDARDS**

KELPIE™ BALI Lantern



EACH UNIT COMES WITH:

2 x QBL LED E27 screw in globes

2 x securing plates to hold the lid and the body of the unit together



Component Parts

GUARANTEE All PestWest traps are guaranteed for 3 years (excluding LED globes and sticky boards).
Manufacturer reserves the right to vary model specifications without notice

Thank you for purchasing a Pestwest Quality Product. Your unit has been designed for performance,
durability and reliability to ensure many years of trouble free use.

WARNING - PLEASE READ INSTRUCTION CAREFULLY

PestWest Electronics Ltd operates a quality
management system certified to ISO 9001

PestWest® Australia
4 Tesla Link, Wangara, Perth ,W.A 6065
Office: +61 (8) 9302 2088
email: info@pestwest.com.au

www.pestwest.com

Confidence in
Fly Control